



IP



IP INOX



IP



IP 400 MINI



IP RAIN

A series of submersible pumps designed for pumping clean and slightly polluted water, not containing abrasive elements (e.g. sand). Pumps are used to drain flooded rooms, swimming pools and wells. They can also pump water from ponds, rivers, reservoirs and shallow ring wells.

Characteristics:


- Discharge connector to which various diameters of the discharge hose can be adapted
- Float switch controlling the pump operation and protecting against dry running
- Light weight of the pump
- Thermal protection built into the motor winding
- Warranty and post-warranty service
- 24-month warranty

Technical data:

- Maximum liquid temperature: 35°C
- Power supply: 230 V
- Insulation class: B
- Operating mode: continuous
- Ingress protection: IP68
- Power cable length: 10 m
- Working position: vertical
- Motor speed: 2850 RPM

Materials:

- Housing: technopolymer (IP) or AISI 304 stainless steel (IP INOX)
- Shaft: AISI 304 stainless steel
- Impeller: Noryl
- Mechanical seal: SIC / graphite

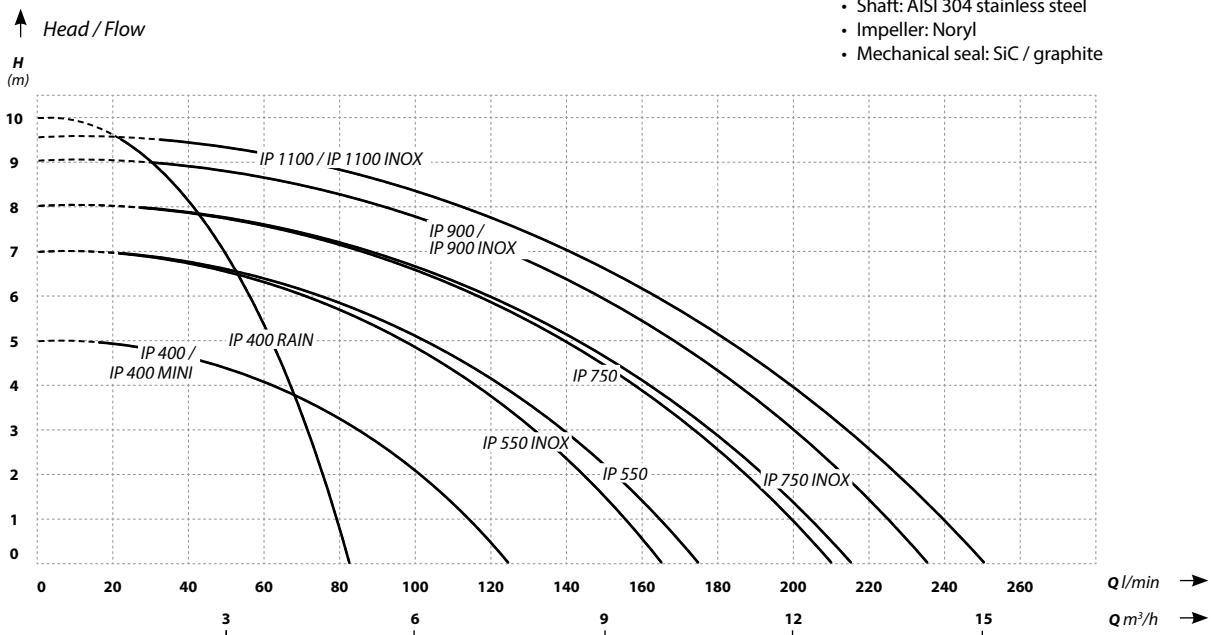

Model	Head (m)	Flow (l/min)	Motor power (W)	Power supply (V)	Power consumption (A)	Passage through the impeller (mm)	Connections (inch)	Dimensions diameter/height (cm)	Weight (kg)
IP 400 / MINI	5	125	400	230	1,25	30	1-1½	20 / 34 18 / 25	3,8 3,4
IP 400 RAIN	10	83	400	230	1,30	1	¾-1	17 / 28 b. connector	4,1
IP 550	7	175	550	230	1,6	30	1-1½	23 / 31	4
IP 750	8	210	750	230	2,15	30	1-1½	23 / 33	4,3
IP 900	9	235	900	230	2,5	30	1-1½	23 / 34	4,6
IP 1100	9,5	250	1100	230	2,75	30	1-1½	23 / 33	5
IP 550 INOX	7	165	550	230	1,6	30	1-1½	23 / 34	5,4
IP 750 INOX	8	215	750	230	2,15	30	1-1½	23 / 36	5,8
IP 900 INOX	9	235	900	230	2,5	30	1-1½	23 / 37	6,1
IP 1100 INOX	9,5	250	1100	230	2,75	30	1-1½	23 / 38	6,3