



Pressure hoses

Flexible discharge hoses intended for pumping water and sewage. Hoses available in the following versions:

- Eco flexible hose – blue discharge hose with a maximum allowable pressure of 2 bar, in 50 m sections. Available sizes: 1" and 2"
- PVC – blue discharge hose with a maximum allowable pressure of 2 bar, in 50 m sections. Available sizes: 1" / 1¼" / 1½" / 2" / 2½" / 3"
- Canvas hose (fire hose) and canvas hose with quick connectors – white hose with a maximum allowable pressure of 8 bar. Available sizes: 1½" / 2"



Eco hose



PVC hose



Canvas hose



Canvas hose with quick connector

Application

Drainage of excavations and flooded rooms, pumping out sewage and water from lakes, ponds and rivers using deep-well pumps.

Model	Type	1"	1¼"	1½"	2"	3"	Max. pressure
Eco rubber hose							
Rubber hose blue		50 m	-	-	50 m	-	2 bar
Canvas hose		30 m	-	30 m		20 / 30 m	
Canvas hose with quick connector		-	-	-	20 m / 30 m	-	8 bar
Canvas hose with MAX quick connectors		-	-	-		-	

Pool hoses

Pool hoses – rolls

A series of pool hoses designed for connecting various pumping, filtering, vacuum and cleaning accessories. The hoses are made of high-density polyethylene (HDPE), which ensures flexibility, low weight and high durability. The material is resistant to UV radiation, chlorine and unfavourable weather conditions. The hoses come in 50 m rolls with diameters of 32 mm and 38 mm, from which you can cut any length that is a multiple of 1 m.




Pool hoses – sections

A series of pool hoses designed to connect various pumping, filtering, vacuum and cleaning accessories. The hoses are available in 11 m sections with diameters of 32 mm and 38 mm, which have rotary connectors installed.

Operating temperature range: from -15° C to +60° C

Advantages:

- Very flexible and buoyant
- Smooth inner coating
- Crush-resistant structure
- High tightness
- Small bending radius
- Tear resistance
- High tensile strength
- Available in rolls or 11 m lengths with adapters

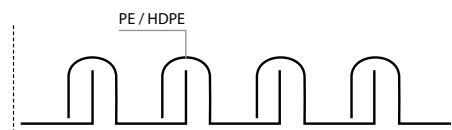

Model	Diameter (inches)	Length (m)	Adapters	Possibility to adjust the length	Working vacuum (bar)	Test pressure (bar)
Hose (roll) 32 mm	1¼	50	no	yes	0,8	4
Hose (roll) 38 mm	1½					
Hose 11 m / 32 mm	1¼	11	yes	no	0,8	4
Hose 11 m / 38 mm	1½					